




Series SDCT15

Compression Load Cell
Specially Designed
For Truck Scales (5t ~ 15t)


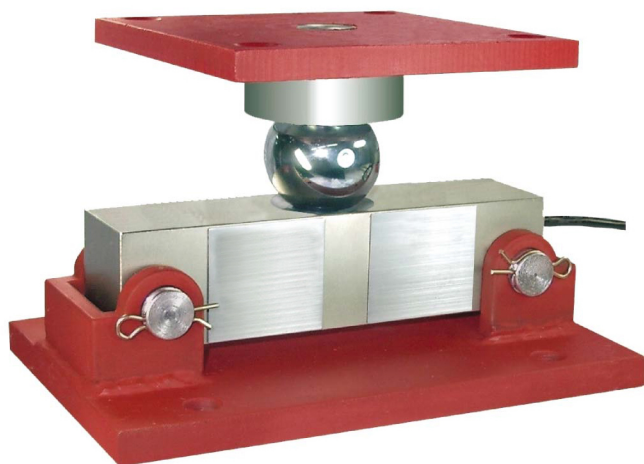


Specially designed for midium size truck scales in harsh environments.

The effective integration of the SDCT15 is that mount and double ended shear beam load cell eliminates the need for troublesome check roads, links, expansion assemblies and other peripheral hardware.

The unique spherical ball point loading mechanism makes lateral movement of the assembly possible, while controlled floating of the scale deck is allowed.

- High overload tolerance
- Self centering design
- Electroless nickel plated alloy tool steel
- 0.03% accuracy
- Protection against harsh environment

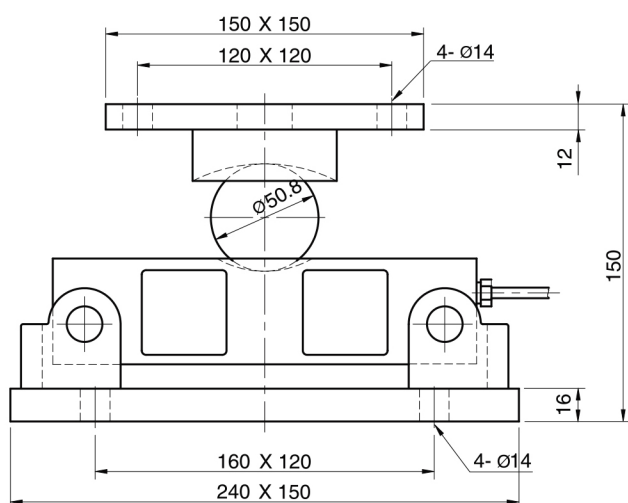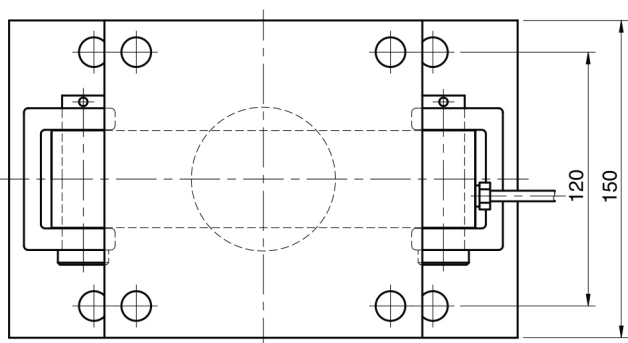

SPECIFICATIONS

TYPE	SDCT15
Rated capacity (R.C.)	5, 10, 15t
Rated output(R.O.)	2.0mV/V $\pm$ 0.25%
Non-linearity	$\leq$ 0.03% R.O.
Hysteresis	$\leq$ 0.03% R.O.
Non-repeatability	$\leq$ 0.03% R.O.
Creep error	$\leq$ 0.03% in 20min.
Zero balance	$\leq$ 1% R.O.
Compensated temperature range	-10 ~ 70°C
Operating temperature range	-20 ~ 80°C
Temp. effect on rated output	$\leq$ 0.02% LOAD/10°C
Temp. effect on zero balance	$\leq$ 0.03% R.O./10°C
Terminal input resistance	800 Ohms $\pm$ 30 Ohms
Terminal output resistance	700 Ohms $\pm$ 5 Ohms
Insulation resistance (Min.)	2000 MOhms at 50V DC
Excitation voltage	10V(Recommended), 15V(Max.)
Electrial connection	Ø7mmx6m(22AWG x 4Core Shielded)
Protection class	meets IP 67
Safe overload	150% R.C
Ultimate overload	300% R.C

Weight : 12.5kg


ORDERING INFORMATION

SDCT15 - 10T

TYPE
SDCT15

CAPACITY
5, 10, 15ton

WIRING INFORMATION



* Specifications are subject to change without notice

WZO CONTROLS LTD