



Series QNTB/QNIB

General Purpose Pressure Sensor



QNTB/QNIB sensing element has excellent temperature properties by adopting a self temperature compensation gauge. A diaphragm and a pressure port are configured as one body for the prevention of leakage. It has superior durability for an instant over pressure.

Feature

- Self temperature compensation foil strain gauge
- Measuring range 0~400MPa
- mVDC Output
- 0.25%FS(QNIB), 0.5%FS(QNTB) accuracy
- Stainless steel media-wetted materials

Applications

- Process control
- Hydraulics & Pneumatic
- Compressor Control
- Chillers
- Refrigeration Equipment

SPECIFICATIONS


	QNTB	QNIB
Range	0~1, 2, 3, 5, 10, 20, 30, 35, 50, 100, 250, 400MPa (Gauge) -0.1~0, 1, 2, 3, 5, 10, 20, 30, 35, 50, 100, 250, 400MPa (Gauge)	
Performance		
Accuracy	±0.5%FS(RSS)	±0.25%FS(RSS)
Thermal Effect on Zero	±0.05%FS/°C	±0.02%FS/°C
Thermal Effect on Span	±0.05%FS/°C	±0.02%FS/°C
Compensated Temperature Range	-10 ~ 70°C	-20 ~ 80°C
Operating Temperature Range	-20 ~ 80°C	-30 ~ 100°C (Optional -30~120°C)
Electrical		
Excitation	12VDC Max.	
Sensitivity	1.5mV/V (1.0mV/V : 1MPa, 400MPa)	
Input Impedance	350Ω (nominal)	380Ω (nominal)
Output Impedance	350Ω (nominal)	
Insulation Resistance	5MΩ @50VDC Min.	
Electrical Connection	Connector, Cable	
Physical		
Proof Pressure	150%FS Max.(≤100MPa), 120%FS Max.(>100MPa)	
Burst Pressure	200%FS Min..(≤100MPa), 130%FS Min.(>100MPa)	
Vibration	49.1m/s ² {5G}, 10~500Hz	
Shock	981m/s ² {100G}	
Pressure port	R(PT)3/8" (≤100MPa), UNF9/16"Female(>100MPa)	
Media-Wetted Materials	Stainless Steel 630	
Weight	Approx. 100g (Sensor Only)	

* Specifications are subject to change without notice


WZO CONTROLS LTD

Dimension


► Connector Type

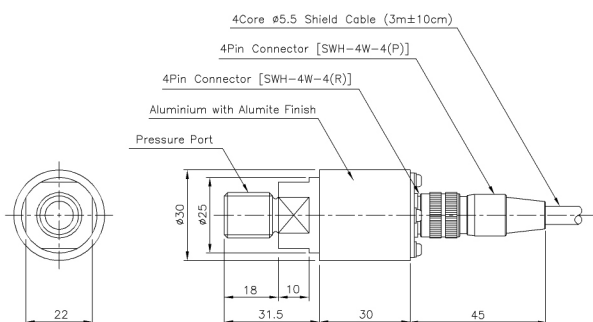


▶ Port of 250MPa Type

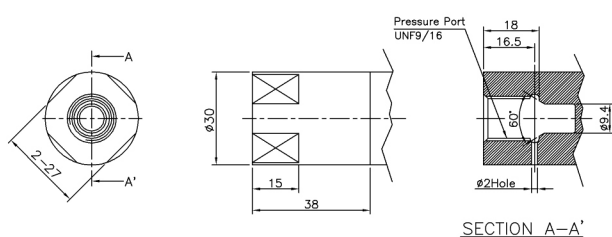


► Cable Gland Type

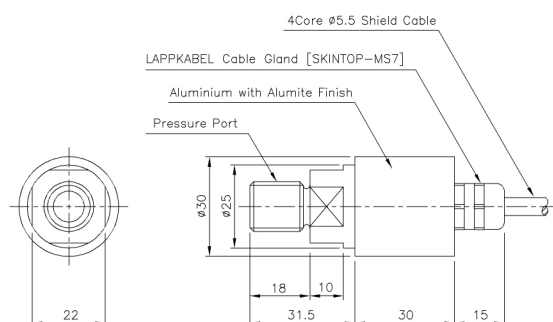

▶ Port of 400MPa Type

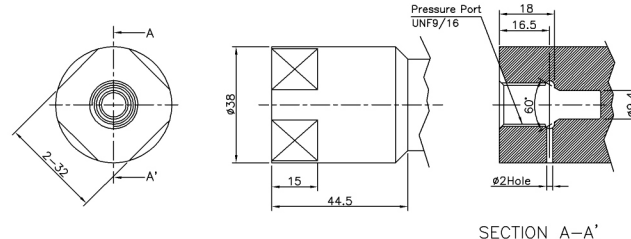

Internal Circuit Diagram

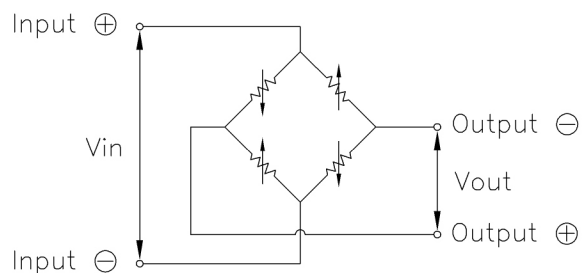

External Connections

Connector Pin No.	Wire Color	Connections
1	Red	Input $\oplus$
2	White	Output $\ominus$
3	Black	Input $\ominus$
4	Green	Output $\oplus$
5	Shield	Earth

Ordering Information

QNTB 0001 M A P A

Model Name

QNTB : Accuracy 0.5%FS

QNIB : Accuracy 0.25%FS

Pressure Range

XXXX : Pressure

CXXX : Compound Pressure

Option

A : Normal

B : Temperature Range $-30\sim 120^{\circ}\text{C}$

Connecting Methods

P : Connector

S : Cable Gland

Pressure port

A : R(PT)3/8"

K : UNF9/16"(Female)

Pressure Unit

M : MPa

B : bar

K : kgf/cm² P : psi